

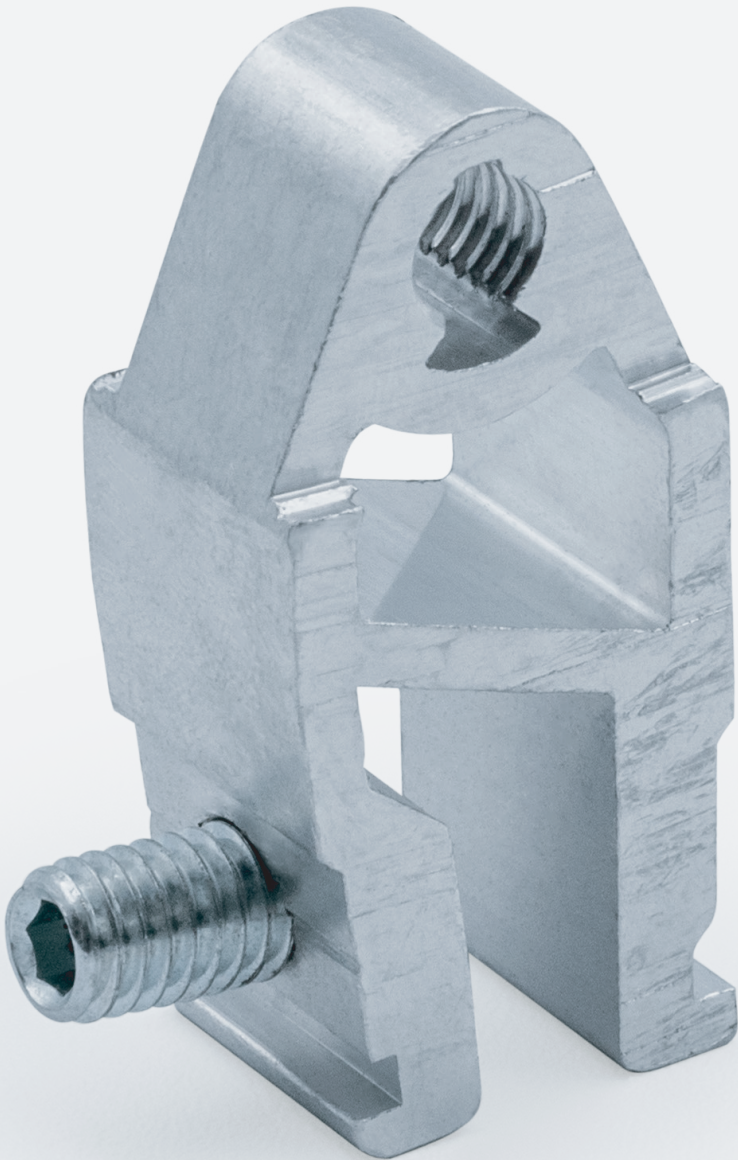


EUROPEAN OPEN
T-JOINT
17

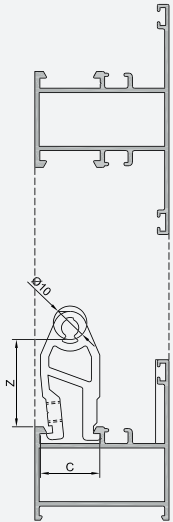

	Item	Dimension A	Dimension C	Dimension D	Dimension Z	Units	Price
1.	17/1810	9.7	17.7	-	26.0	200	0,6827
2.	17/1811	10.7	17.7	-	26.0	200	0,6827
3.	17/1812	11.7	17.7	-	26.0	200	0,6827
4.	17/1813	12.7	17.7	-	26.0	200	0,7071
5.	17/1814	13.7	17.7	-	26.0	200	0,6827
6.	17/1815	14.7	17.7	-	26.0	200	0,7071
7.	17/1816	15.7	17.7	-	26.0	200	0,7071
8.	17/1817	16.7	17.7	-	26.0	200	0,8170
9.	17/1819	18.7	17.7	-	26.0	200	0,8170
10.	17/1825	24.7	17.7	-	26.0	300	0,9757
11.	17/1826	25.7	17.7	-	26.0	300	0,9756
12.	17/1827	26.7	17.7	-	26.0	300	0,9756
13.	17/1828	27.7	17.7	-	26.0	300	0,9756
14.	17/1831	30.7	17.7	-	26.0	300	0,9756
15.	17/1832	31.7	17.7	-	26.0	300	1,0975
16.	17/1833	32.7	17.7	-	26.0	200	1,0975
17.	17/1835	34.7	17.7	-	26.0	200	1,0974
18.	17/1836	35.7	17.7	-	26.0	200	1,0974
19.	17/1837	36.7	17.7	-	26.0	200	1,0974
20.	17/1839	38.7	17.7	-	26.0	200	1,1340
21.	17/1840	39.7	17.7	-	26.0	200	1,1340
22.	17/1842	41.5	17.7	-	26.0	200	1,2022
23.	17/1845	44.7	17.7	-	26.0	200	1,2633

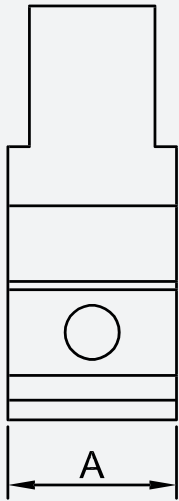

T-joint compatible with all European systems, has an inner thread, whose purpose is to stop the screw threads breaking.
This quick and easy to assemble joint includes a grub screw positioned on the lateral side of the joint that keeps its inside open, facilitating an easy assembly. The benefit of this is that the joint can be directly inserted in the profile at any point instead of only at the end.

TECHNICAL DATA

SCREWS
Zinc plated, also available in stainless steel

PUNCH PRESS REF.
PA-37/18

ACCESSORIES
25, 37