



MIXED T-JOINT
19

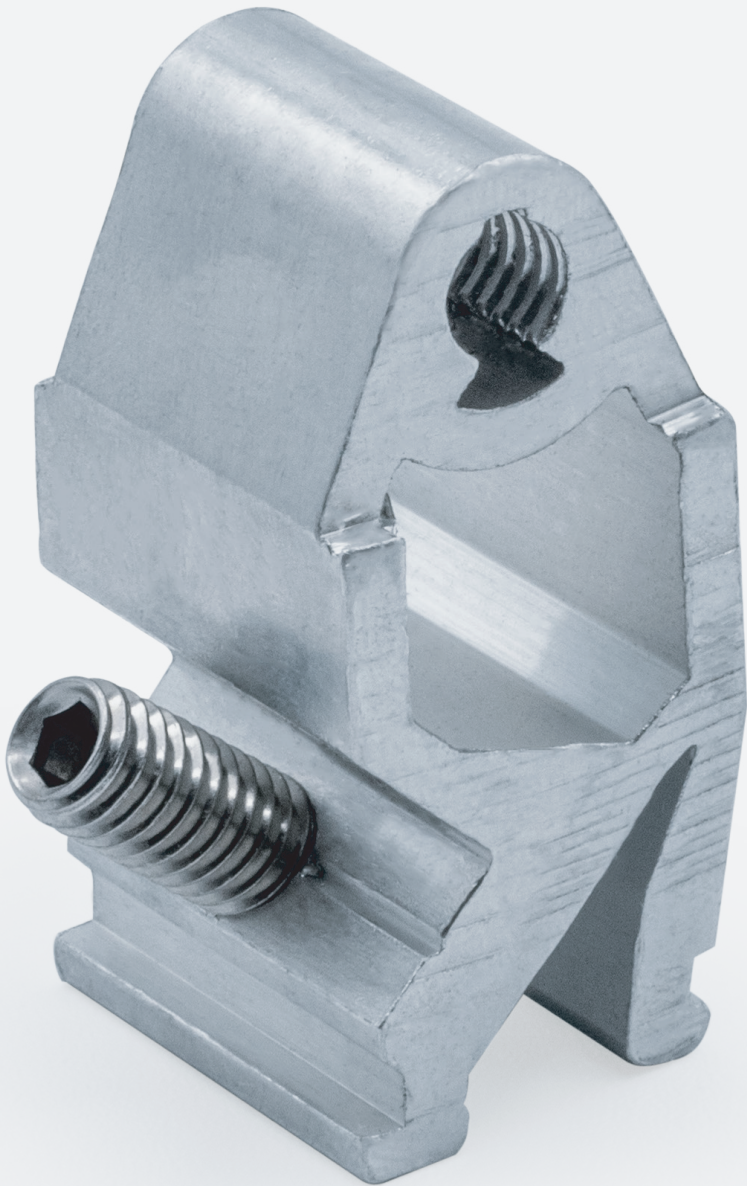

	Item	Dimension A	Dimension C	Dimension D	Dimension Z	Units	Price
1.	19/1814	14.7	17.7	-	26.0	200	0,7168
2.	19/1816	15.7	17.7	-	26.0	200	0,7425
3.	19/1819	18.7	17.7	-	26.0	200	0,8579
4.	19/1821	20.7	17.7	-	26.0	300	1,0245
5.	19/1826 I	25.8	17.7	-	26.0	300	1,0244
6.	19/1831 I	30.6	17.7	-	26.0	300	1,0244
7.	19/1832	31.9	17.7	-	26.0	300	1,1524
8.	19/1835	34.7	17.7	-	26.0	200	1,1523
9.	19/1836 I	35.7	17.7	-	26.0	200	1,1523
10.	19/1837 I	36.7	17.7	-	26.0	200	1,1523
11.	19/1840	39.7	17.7	-	26.0	200	1,1907
12.	19/1843	43.0	17.7	-	26.0	200	1,2623

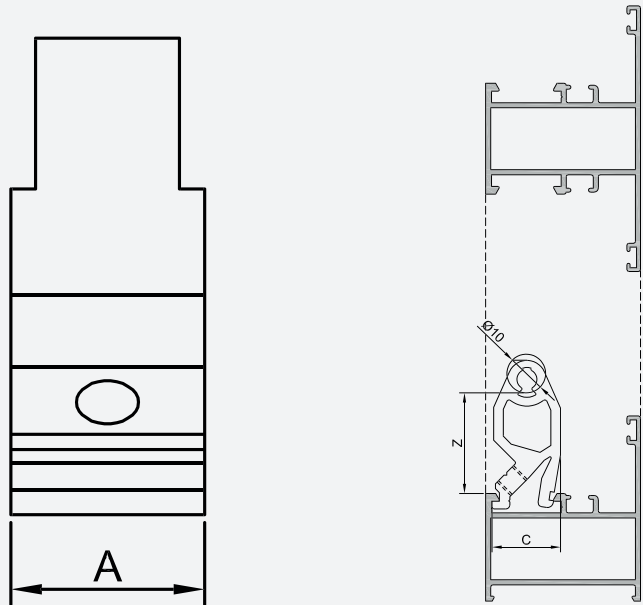

T-joint compatible with all European systems, being more robust than the 17 series. This fitting has an inner thread, whose purpose is to stop the screw threads breaking.

Thanks to the grub screw on its lateral side and to its open lower part, it can be positioned directly on the profile at any point.

With its innovative design we have been able to avoid any movement of the T- Joint on the profile, achieving a more than perfect fit.

TECHNICAL DATA

SCREWS
Zinc

PUNCH PRESS REF.
PA-37/18

ACCESSORIES
25, 37