



PUNCH PRESSES PA

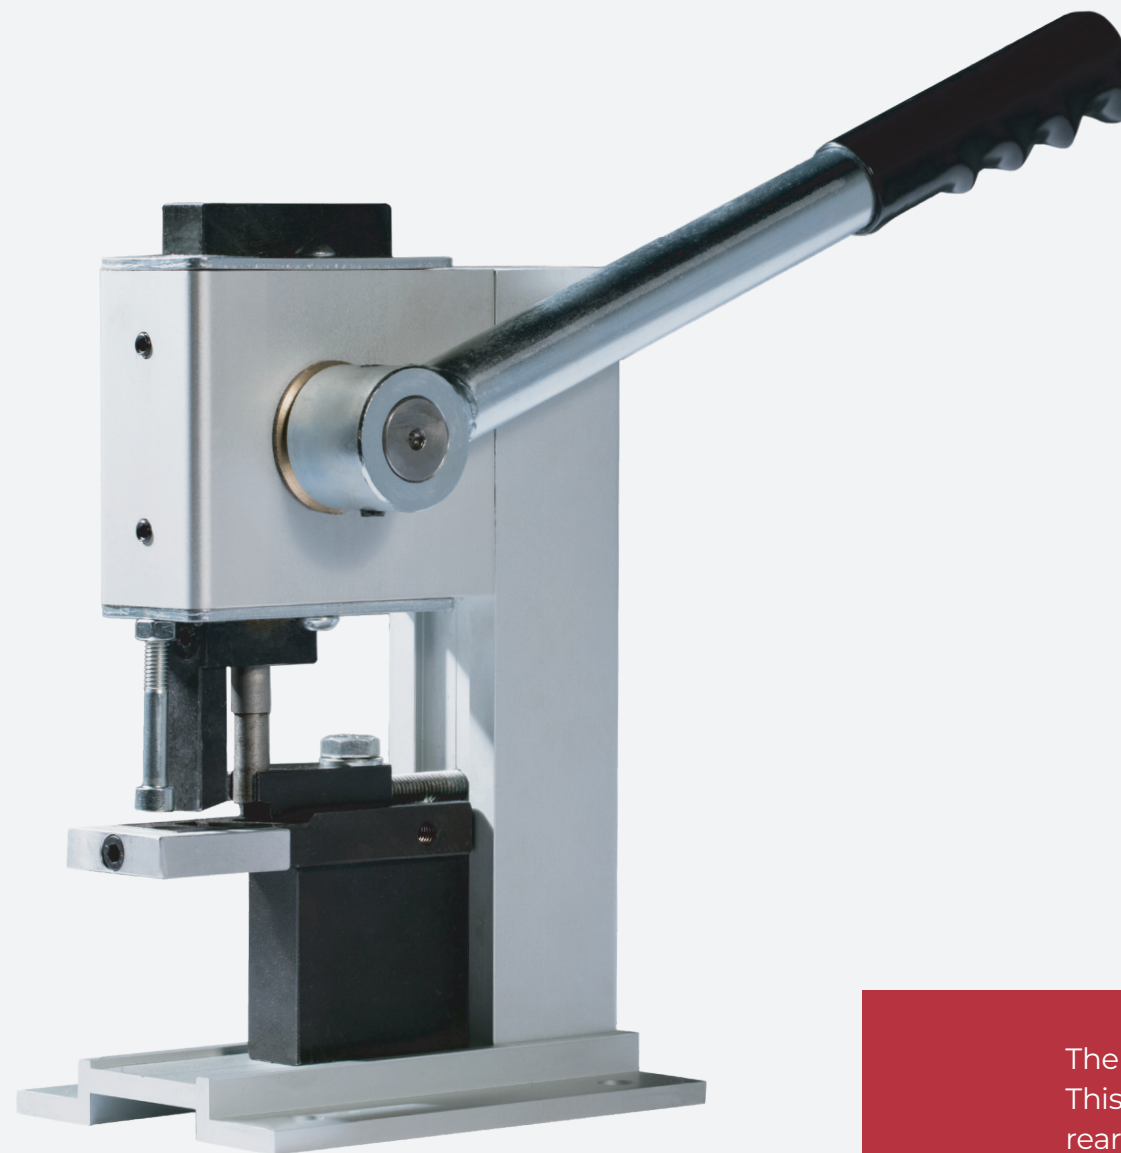

	Item	Dimension A	Dimension C	Dimension D	Dimension Z	Units	Price
1.	PA-37					1	323,5513
2.	PA-37/18					1	323,5513
3.	PA-8/18					1	437,2316
4.	PA-8/25					1	437,2316
5.	PA-8/30					1	437,2316
6.	PA-8/30-10.5					1	471,1316
7.	PA-T4/12					1	437,2316
8.	PA-T6/11					1	437,2316
9.	PA-T8/18					1	437,2316
10.	PA-T9/18					1	437,2316
11.	PA-TM/18					1	471,1316

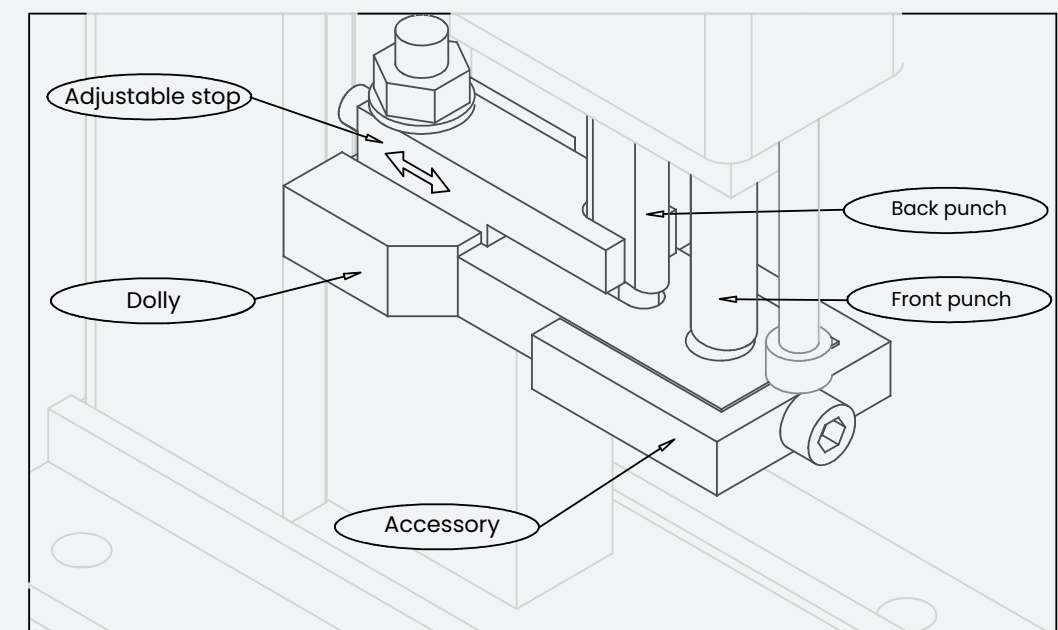

The adjustable stop will need to be adjusted depending on the thickness of the profile. This is adjusted by unfastening the nut at the top, and with the rod that stands out on the rear side of the punch press, we calibrate its position. Once we fasten the upper nut again, with the aim of avoiding the adjustable stop moving we can start with the punch process.

The dolly without any accessory gives you the facility to punch within 125 mm.
The dolly with an accessory of 30 mm gives you the facility to punch within 150 mm.
The dolly with an accessory of 37 mm gives you the facility to punch within 185 mm.

