


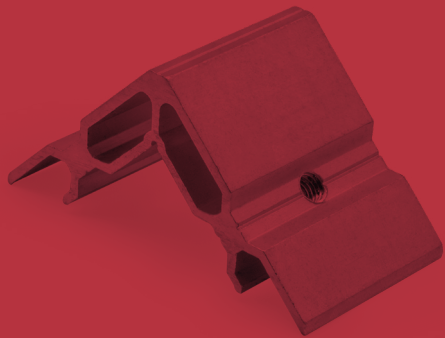


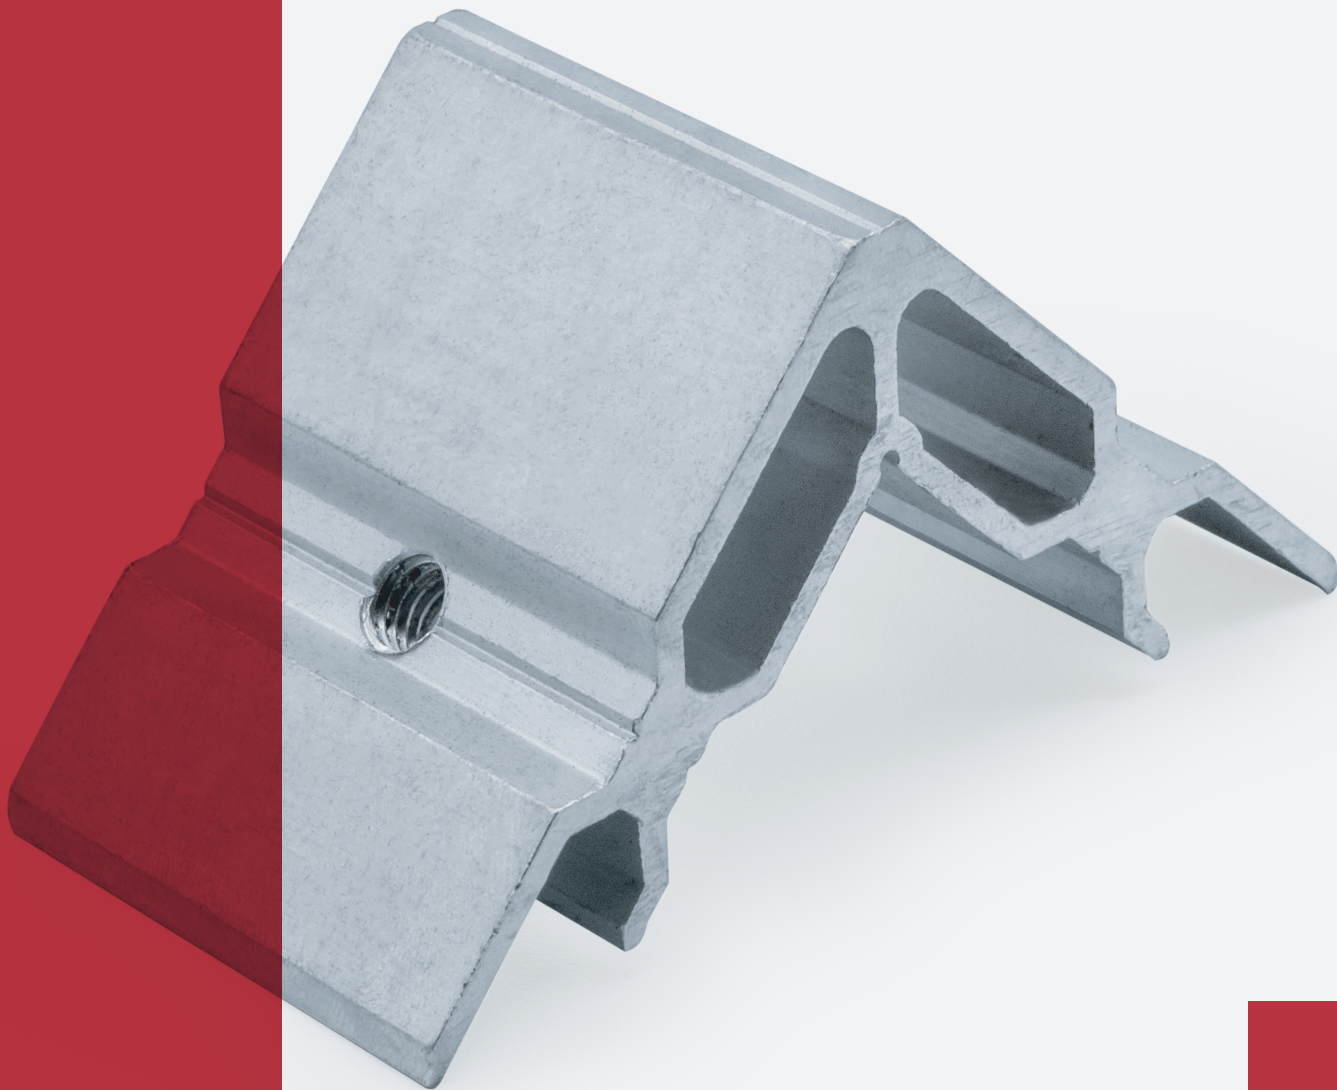

REINFORCED
TUBULAR FITTING
T

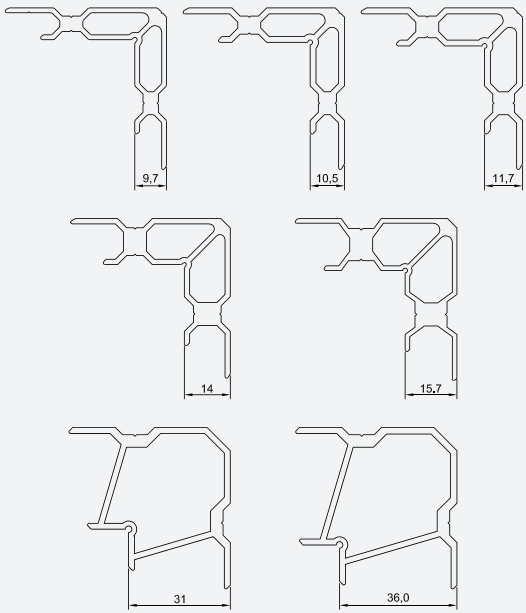

	Item	Dimension A	Dimension C	Dimension D	Dimension Z	Units	Price
1.	1309TRC	12.0	9.7	-	26.5	200	0,7133
2.	1409TRC	14.0	9.7	-	26.5	200	0,7133
3.	1614TRC	15.9	14.0	-	26.5	200	0,7132
4.	1814TRC	17.5	14.0	-	26.5	200	0,7132
5.	1910TRC	19.0	10.5	-	26.5	200	0,6530
6.	2416TRC	24.5	15.7	-	26.5	200	0,8826
7.	2611TRC	25.8	10.5	-	26.5	200	0,7737
8.	2614TRC	25.0	14.0	-	26.5	200	0,8462
9.	2709TRC	26.2	9.7	-	26.5	200	0,8221
10.	2711TRC	26.3	10.5	-	26.5	200	0,7737
11.	3012TRC	29.8	11.7	-	26.5	200	0,7737
12.	3336TD	32.8	35.8	12.5	26.5	100	0,9791
13.	3612TRC	35.7	11.7	-	26.5	200	0,8831
14.	3614TRC	34.9	14.0	-	26.5	150	0,8462
15.	3711TRC	36.5	10.5	-	26.5	200	0,8464
16.	3714TRC	36.5	14.0	-	26.5	150	0,8462
17.	3714TRD	36.5	14.0	12.5	26.5	150	0,8462
18.	3716TRC	36.5	15.7	-	26.5	150	0,8826
19.	3731TC	36.5	31.0	-	26.5	100	0,9791
20.	3731TD	36.5	31.0	12.5	26.5	100	0,9791
21.	3736TC	36.5	36.0	-	26.5	100	0,9791
22.	4214TRD-160	41.5	14.0	16.0	26.5	150	1,0999
23.	4810TRD-90	47.1	10.5	9.0	26.5	150	1,1473

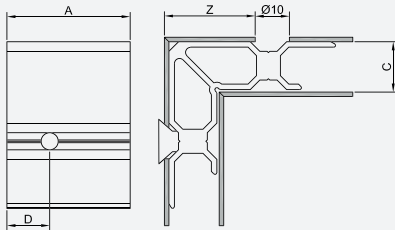

Reinforced Tubular Corner Joint with a tubular internal support with a solid mass of aluminium where the screw is located, which allows a greater number of threads which makes it able to be tightened up from the inside. Available with two conical screws, which due to their shape, join the angle when tightened.

TECHNICAL DATA

SCREWS
Zinc

PUNCH PRESS REF.
PA-37
PA-37/18

ACCESSORIES
25, 37
25, 37

